LOUDSPEAKERS

Ceiling speaker

A-226DEN » 6" · 6 W · 100 dB · EN 54

6" ceiling loudspeaker for flush mounting with 6 W RMS power, 100 V line, with frameless metal grill and metal rear cover. Quick installation using spring clamps with anti-vibration protective caps. EN 54-24 certification.

Technical specifications

Rated Power (RMS)	6 W
Power Taps	6 W, 3 W &1.5 W
Impedance	1.67 kΩ, 3.33 kΩ & 6.67 kΩ
Sensitivity	92 dB SPL at 1 W IEC268-5
Sound Pressure	100 dB SPL at 6 W IEC268-5
Sensitivity EN54-24	80 dB SPL at 1 W / 4 m
Frequency Response	56 ~ 18,000 Hz
Dispersion 1kHz / 4kHz	175º / 90º
Temperature range	-10ºC ~ +55ºC
Protection degree	IP21
Cutout Size	ø 188 mm
Dimensions (mm)	ø 220 x 107
Weight	1,40 kg
Finish	Metallic, box and grid
Colour	White RAL 9016
Standard	EN54

Dimensions

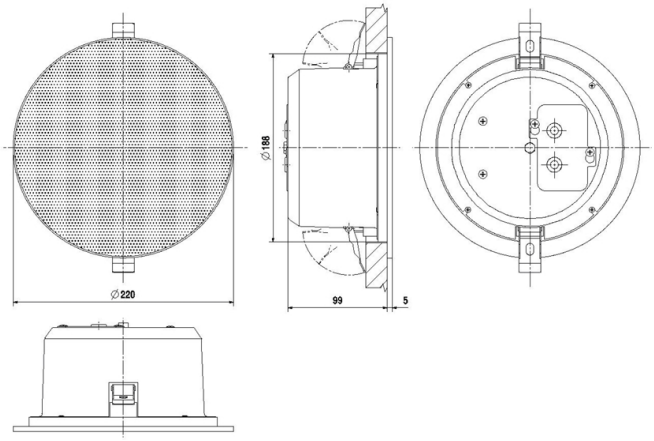

www.optimusaudio.com

OPTIMUS SOUND INNOVATION
C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300
FAMILY COMPANY