LOUDSPEAKERS

Ceiling speaker

A-228EN » 8" · 20 W · 110 dB

20 W RMS power 8" ceiling loudspeaker, 100V line, with frameless metal grille and metal back cover. Quick installation using spring clamps with protective caps for vibrating damping and WAGO 221 connectors. EN 54-24 certification.

Technical specifications

Loudspeaker	8"
Rated power (RMS)	20 W
Power taps 100V	20, 10 & 5 W
Impedance	500 Ω, 1kΩ & 2kΩ
Sensitivity	97,2 dB SPL at 1 W, 1 m. IEC268-5
Sound pressure	110,2 dB SPL at 20 W, 1 m. IEC268-5
Sensitivity EN 54-24	85,2 dB SPL a 1 W, 4 m
Frequency response	50 ~ 18.900 Hz
Cutout size	Ø 240 mm
Dimensions (mm)	Ø 265 x 115 (depth)
Weight	1.60 kg
Finish	Metallic, housing & frame
Colour	White RAL 9016
Mounting	Spring clamps
Power selection	Terminals
Protection degree	IP21

Dimensions

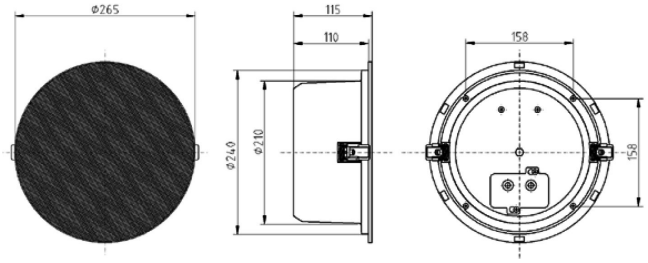

www.optimusaudio.com

OPTIMUS SOUND INNOVATION
C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300
FAMILY COMPANY