Ceiling speaker

A-225EN » 5" · 6 W · 94,5 dB · EN54

A 5" ceiling loudspeaker of 6 W, 100 V line. It can be installed in shallow suspended ceilings and has a antistatic PET-plastic contact protection. EN 54-24 certified.

Technical specifications

Loudspeaker	5"
Rated Power (RMS)	6 W
Power Taps	6, 3 & 1.5 W
Impedance	1k6 Ω, 3k3 Ω & 6k6 Ω
Sensitivity	86.8 dB SPL at 1 W, 1 m IEC268-5
Sound Pressure	94.5 dB at 6 W, 1 m IEC268-5
Sensitivity EN54-24	74.8 dB SPL at 1 W / 4 m
Frequency Response	57 ~ 24,000 Hz
Cutout Size	Ø 150 mm
Dimension (mm)	Ø 181,5 x 66 (depth)
Weight	0,6 kg
Finish	ABS, metallic grille
Colour	White RAL 9016
Mounting	Springs
Power selection	Transformer tabs
Standard	EN54. In compliance with BS-5839, part 8.

Dimensions

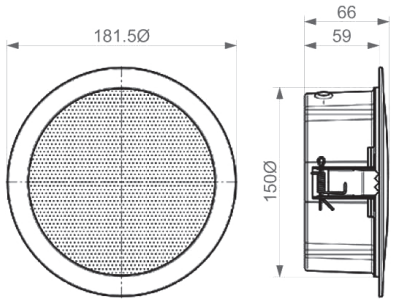

www.optimusaudio.com

OPTIMUS SOUND INNOVATION
C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300