LOUDSPEAKERS

Horn speaker

AC-930EN » 30 W · 113 dB · IP66 · EN 54

Horn speaker of 30 W RMS, 100 V line. Low impedance connection available (20 ohm). Impact resistant ABS housing UL94V0. Degree of protection IP66. EN-54 certified.

Technical specifications

RMS power	30 W
Power selection	30, 20, 10 & 5 W
Low impedance connection	20 Ω
Frequency response	250 ~ 15,000 Hz
SPL 1 m, 1 kHz	97.9 dB (1 W) / 112.7 dB (30 W)
Temperature range	-20º C to 90º C
Degree of protection	IP66 (IEC-529)
Finishing	ABS UL94V0
Dimensions (mm)	303 (lenght), 235 (mouth)
Weight	2.17 kg
Normative	EN 54-24 / BS 5839, p.8

Dimensions

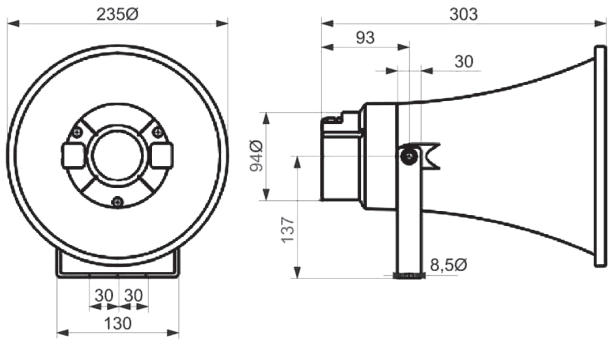

www.optimusaudio.com

OPTIMUS SOUND INNOVATION
C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300